



Siphon King Gas Powered Pump

Instructions

Please refer to Owner's Manual for complete operating instructions.

- 4-cycle, single cylinder, air-cooled gasoline engine
- Excellent for high volume water transfer
- Unrestricted flow 40 gallons per minute
- 1" inlet/outlet diameter
- Includes two (2) 6' hoses for intake and discharge, garden hose adapter, and strainer



Back




Front

Siphon King® Gas Powered Pump

Catalog #	Item	Selling Unit
48350	Gas Powered Pump	1 per box

Parts Included

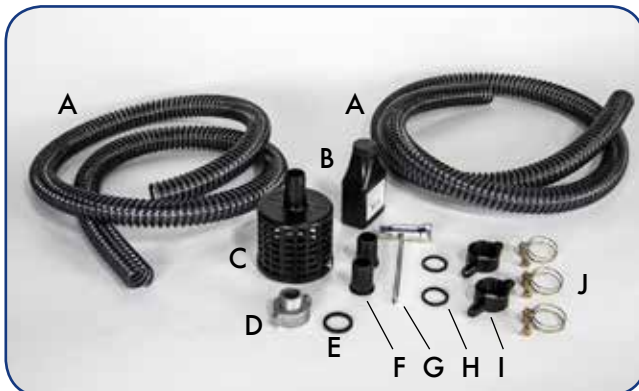

- A - 6' Hose
- B - Oil
- C - Strainer
- D - Garden Hose Adapter
- E - Large O-Ring Seal (Garden Hose Adapter)
- F - Hose Adapter #2
- G - Wrench
- H - Small O-Ring Seal (Hose)
- I - Hose Adapter #1
- J - Hose Clamps



Siphon King Gas Powered Pump

Siphon King® Gas Powered Pump

Siphon King® Gas Powered Water Pump - Technical Specifications	
General	
Product Name	Siphon King® Gas Powered Water Pump
Model Number (SKU)	48350
Length	11.5"
Width	11.5"
Height	13"
Weight	18.9 lbs
Packaging Dimension	16.5" x 12.6" x 14.6"
Engine	
Engine Type	4-Cycle, Single Cylinder
Displacement	40 cc
Cooling System	Air Cooled
Ignition System	Transistor Magneto
Starting System	Recoil Starter
Operating Mode	Continuous Operation
Engine Oil	SAE 10W-30 or 10W-40 API SM
Engine Oil Capacity	2.7 oz
Fuel	Unleaded; 86 or higher
Fuel Tank Capacity	0.2 US gal
Spark Plug Gap	0.024"
Idle Speed	3,300 ± 100 r/min
Pump	
Suction Port Diameter	1.0"
Discharge Port Diameter	1.0"
Max. Total Head	82 ft
Max. Suction Head	25 ft
Discharge Capacity	39.6 gal/min (max)